

ASML PAS 2500 (UV 400) Stepper

Asset ID: 19236

Configuration Details:

ASML PAS 2500 / 40 (UV 400) Stepper

- UV lamp, 365 nm i-line
- Supply Voltage: 220 Vac +/- 10%
- Power (input: 2kVA
- Freq: 50/60Hz



More Photos on Following Pages

To our knowledge, the information contained in this data sheet is accurate, but it may contain errors and we do not warrant the completeness or accuracy of this data.

Interested parties may contact Bridge Tronic Global for additional information at +1 949.396.1395 or sales@bridgetronic.com



QUICK
LEAD TIMES



QUALITY
EQUIPMENT



COMPETITIVE
PRICING



Interested parties may contact Bridge Tronic Global for additional information at +1 949.396.1395 or sales@bridgetronic.com



QUICK
LEAD TIMES



QUALITY
EQUIPMENT



COMPETITIVE
PRICING



Interested parties may contact Bridge Tronic Global for additional information at +1 949.396.1395 or sales@bridgetronic.com




QUICK
LEAD TIMES



QUALITY
EQUIPMENT



COMPETITIVE
PRICING

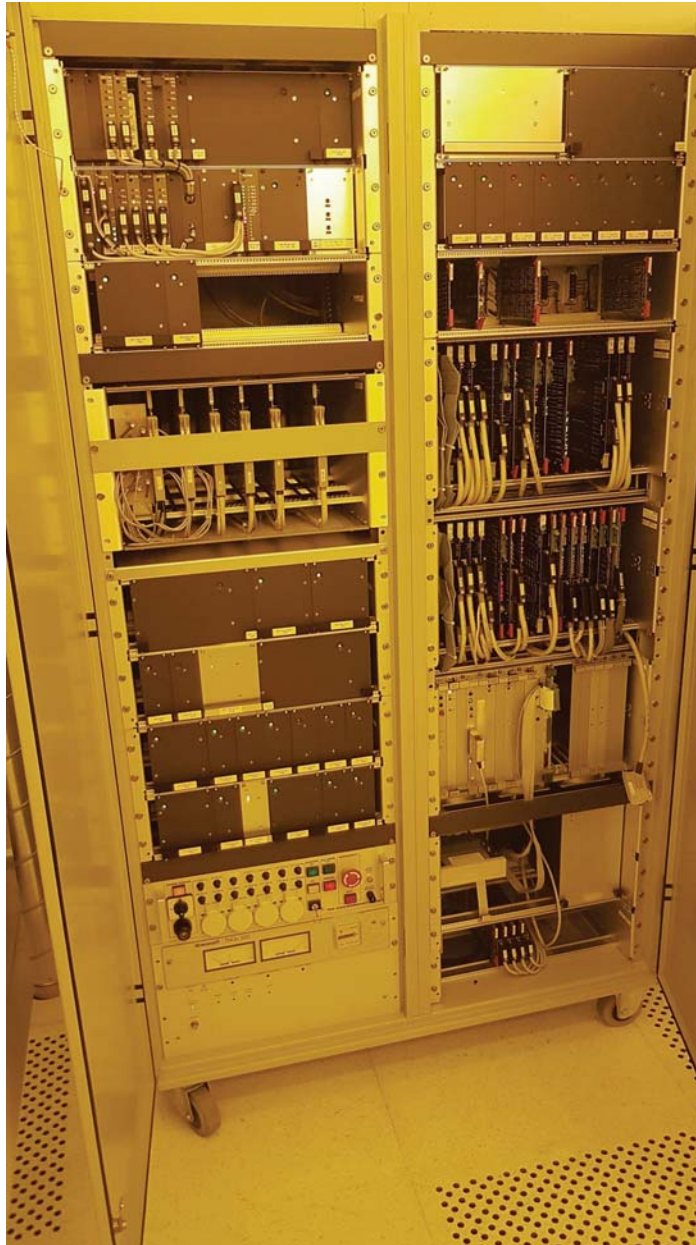

Interested parties may contact Bridge Tronic Global for additional information at +1 949.396.1395 or sales@bridgetronic.com




QUICK
LEAD TIMES



QUALITY
EQUIPMENT



COMPETITIVE
PRICING

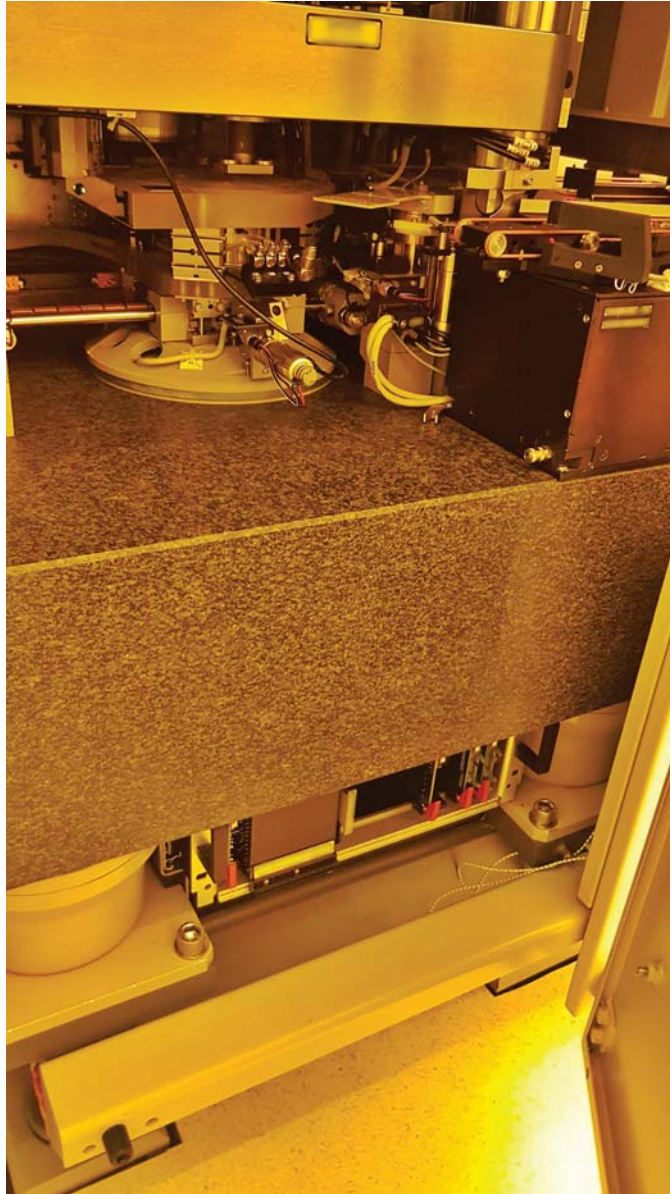

Interested parties may contact Bridge Tronic Global for additional information at +1 949.396.1395 or sales@bridgetronic.com




QUICK
LEAD TIMES



QUALITY
EQUIPMENT



COMPETITIVE
PRICING

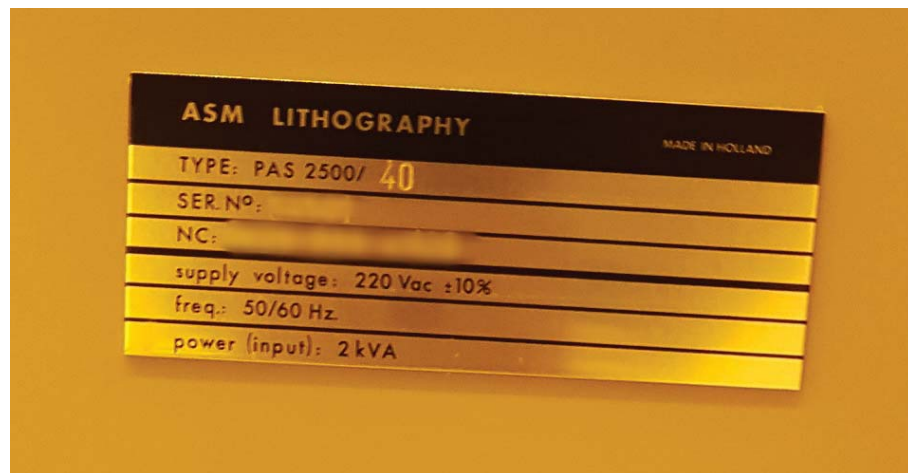

Interested parties may contact Bridge Tronic Global for additional information at +1 949.396.1395 or sales@bridgetronic.com



QUICK
LEAD TIMES



QUALITY
EQUIPMENT



COMPETITIVE
PRICING